

ESPHome

- [Beispiele](#)
 - [Display mit pcf8574t und einer Ampel LED](#)
 - [Luftdaten / Airrohr in ESPHome](#)
 - [Kapazitives Hygrometer](#)

Beispiele

Beispiele

Display mit pcf8574t und einer Ampel LED

Dieses Projekt hängt an der Tür zu meinem Arbeitszimmer und soll der Familie anzeigen, ob ich gerade in einem Meeting bin oder ob man einfach reinplatzen darf.

Hardware und Verdrahtung

TODO

Home Assistant

In Home Assistant wird in der Konfiguration ein `input_select` Dropdownmenü angelegt.

✕

Arbeitszimmer Display Tür

☰

EINSTELLUNGEN
VERWANDTE

Name
Arbeitszimmer Display Tür

Symbol
mdi:hard-hat

Optionen:

Hereinspaziert!	
bin im Meeting!	
nicht stoeren!	

Option hinzufügen HINZUFÜGEN

Entitäts-ID
input_select.az_display_door

Bereich ▼

Entität aktivieren

Deaktivierte Entitäten werden nicht zu Home Assistant hinzugefügt.
Hinweis: Dies funktioniert möglicherweise noch nicht bei allen Integrationen.

LÖSCHEN
AKTUALISIEREN

Dann hab ich noch 3 Automatisierungen mit denen ich die Ampel und den Displaytext einfach steuern kann.

Grüne Ampel:

```
alias: AZ - Display Hereinspaziert!
description: ''
trigger:
  - platform: state
```

```
entity_id: switch.az_display_led_gruen
to: 'on'
from: 'off'
condition: []
action:
  - service: input_select.select_option
    target:
      entity_id: input_select.az_display_door
    data:
      option: Hereinspaziert!
mode: single
```

Gelbe Ampel:

```
alias: AZ - Display nicht stoeren!
description: ''
trigger:
  - platform: state
    entity_id: switch.az_display_led_gelb
    to: 'on'
    from: 'off'
condition: []
action:
  - service: input_select.select_option
    target:
      entity_id: input_select.az_display_door
    data:
      option: nicht stoeren!
mode: single
```

Rote Ampel:

```
alias: AZ - Display Meeting
description: ''
trigger:
  - platform: state
    entity_id: switch.az_display_led_rot
    to: 'on'
    from: 'off'
condition: []
action:
```

```
- service: input_select.select_option
  target:
    entity_id: input_select.az_display_door
  data:
    option: bin im Meeting!
mode: single
```

ESPHome Code

```
esphome:
  name: arbeitszimmer_display_door
  platform: ESP8266
  board: nodemcu2

wifi:
  ssid: !secret iot_wifi_ssid
  password: !secret iot_wifi_password
  power_save_mode: none
  manual_ip:
    static_ip: 172.16.72.103
    gateway: 172.16.72.1
    subnet: 255.255.255.0
    dns1: 172.16.71.1

ap:
  ssid: "Arbeitszimmer Display Door"
  password: !secret fallback_password

captive_portal:

logger:

api:

ota:

web_server:
  port: 80

i2c:
```

sda: D2

scl: D1

switch:

- platform: gpio

 - pin: D5

 - interlock: &interlock_group [az_display_led_rot, az_display_led_gelb,

 - az_display_led_gruen]

 - id: az_display_led_rot

 - name: "LED rot"

- platform: gpio

 - pin: D6

 - interlock: *interlock_group

 - id: az_display_led_gelb

 - name: "LED gelb"

- platform: gpio

 - pin: D7

 - interlock: *interlock_group

 - id: az_display_led_gruen

 - name: "LED grün"

display:

- platform: lcd_pcf8574

 - id: my_display

 - dimensions: 16x2

 - address: 0x27

 - lambda: |-

 - it.printf(0, 0, "%s", id(my_text).state.c_str());

 - it.strftime(0, 1, "%H:%M %d.%m.%Y", id(my_time).now());

text_sensor:

- platform: homeassistant

 - id: my_text

 - name: "Text"

 - entity_id: input_select.az_display_door

time:

- platform: homeassistant


```
id: my_time
```

Nachdem der Code auf den ESP geladen wurde, sollte diese Node im Home Assistant als neue Integration auftauchen. Wenn alles passt, lassen sich nun LEDs und Display über die zur Integration gehörenden Entities steuern.

Ich habe etwas gebraucht, um die i2c-Adresse des Displays herauszufinden. Nach ungefähr einer Stunde habe ich dann festgestellt, dass ESPHome nach dem Boot den i2c-Bus scannt und man dort die Adresse direkt im Log sehen kann.

Alternativ zu dem `input_select` würde auch ein `input_text` funktionieren. Damit kann man auch freien Text eingeben.

In Lovelace sieht das mit der entity-card so aus:

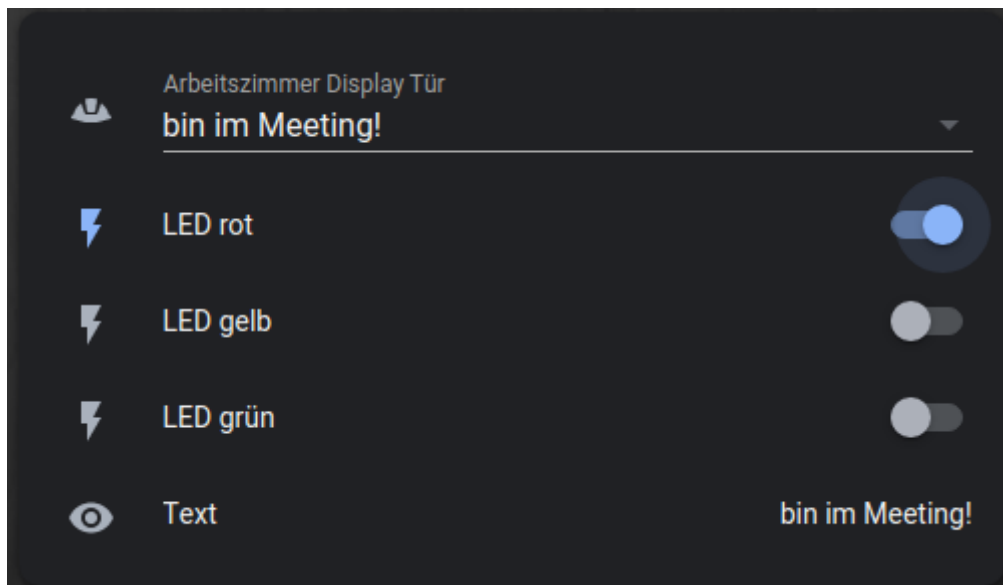

Luftdaten / Airrohr in ESPHome

Hier ist die Funktion des Projekts von luftdaten.info bzw. sensor.community in ESPHome umgesetzt. Es fehlt hier natürlich die Anbindung an die offiziellen externen APIs oder Schnittstellen außerhalb von Home Assistant (z.B: InfluxDB).

```
esphome:
  name: luftdaten1
  platform: ESP8266
  board: nodemcu2

wifi:
  ssid: !secret iot_wifi_ssid
  password: !secret iot_wifi_password
  manual_ip:
    static_ip: 172.16.72.102
    gateway: 172.16.72.1
    subnet: 255.255.255.0
    dns1: 172.16.71.1

  ap:
    ssid: "Luftdaten Fallback Hotspot"
    password: !secret fallback_password

captive_portal:

# Enable logging, but use UART1 as UART0 is used by the sds011 sensor
logger:
  hardware_uart: UART1

api:

ota:

# serial communication SDS011 particle matter concentration sensor
uart:
  rx_pin: D1
  tx_pin: D2
```

```
baud_rate: 9600
```

```
sensor:
```

```
# SDS011 particle matter concentration sensor
```

```
- platform: sds011
```

```
pm_2_5:
```

```
name: "Luftdaten Feinstaubkonzentration <2.5µm"
```

```
pm_10_0:
```

```
name: "Luftdaten Feinstaubkonzentration <10.0µm"
```

```
update_interval: 5min
```

```
# DHTP22
```

```
- platform: dht
```

```
pin: D7
```

```
temperature:
```

```
name: "Luftdaten Temperatur"
```

```
humidity:
```

```
name: "Luftdaten Luftfeuchtigkeit"
```

```
update_interval: 60s
```

```
- platform: wifi_signal
```

```
name: "Luftdaten WiFi Signal"
```

```
id: luftdaten_wifi_signal
```

```
update_interval: 60s
```

```
- platform: template
```

```
name: "Luftdaten WiFi Quality"
```

```
update_interval: 60s
```

```
unit_of_measurement: "%"
```

```
icon: "mdi:wifi"
```

```
lambda: |-
```

```
if (id(luftdaten_wifi_signal).state <= -100) {
```

```
return 0;
```

```
} else if (id(luftdaten_wifi_signal).state >= -50) {
```

```
return 100;
```

```
} else {
```

```
return 2 * (id(luftdaten_wifi_signal).state + 100);
```

```
}
```

Kapazitives Hygrometer

TODO

```
esphome:
  name: bodenfeuchtigkeit1
  platform: ESP8266
  board: nodemcu2

wifi:
  ssid: !secret iot_wifi_ssid
  password: !secret iot_wifi_password
  manual_ip:
    static_ip: 172.16.72.101
    gateway: 172.16.72.1
    subnet: 255.255.255.0
    dns1: 172.16.71.1

ap:
  ssid: "bodenfeuchtigkeit_fallback"
  password: !secret fallback_password

captive_portal:

logger:

api:

ota:

sensor:
  - platform: adc
    pin: A0
    unit_of_measurement: "%"
    filters:
      - median:
          window_size: 7
```

```
    send_every: 4
    send_first_at: 1
  - calibrate_linear:
    - 0.79 -> 0.00
    - 0.34 -> 100.00
  - lambda: if (x < 1) return 0; else return (x);
accuracy_decimals: 0
name: "bodenfeuchtigkeit1"
update_interval: 2s
```